
CONCRETE WATERPROOFING

ABOVE-GROUND CONCRETE SUBSTRATE

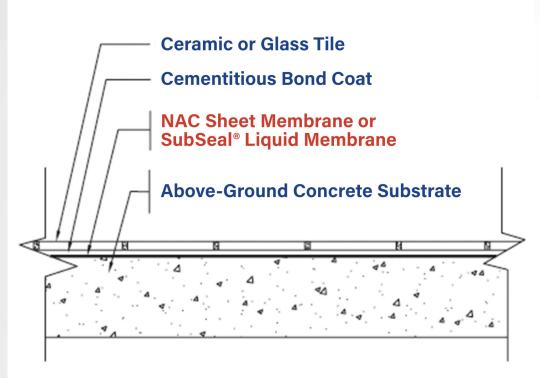

All NAC sheet membranes (ECB®, ECB® 75, Strataflex®, SAM® 3 and Super SAM® 125) and SubSeal Liquid membrane may be used for surfaces that require waterproof protection.

A urethane sealant must be used at butt-joints and termination points for sheet membranes.

For specification purposes, the NAC products used in this system are:

- SubSeal Liquid Membrane
- NAC Sheet Membranes
- NAC Primer (If Sheet Membrane is used)
- NAC Approved Urethane Sealant

Visit NACproducts.com or call 800-633-4622 for more information.

Detail refers to F122A for waterproofing over concrete. See current edition of the TCNA Handbook for additional guidelines.

