


# SOUND CONTROL

## ABOVE GROUND/CONCRETE SUBSTRATE

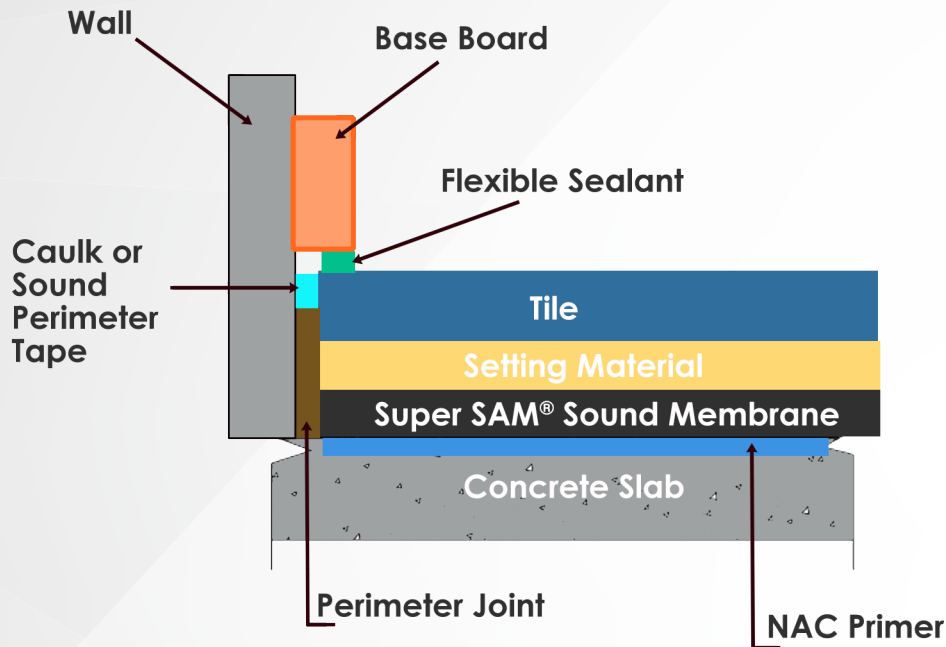

Perimeter joints are required at the edge of the floor area being treated and at any penetration of the floor inside of the perimeter, including where the base board meets the finished floor.

All NAC Sound Abatement Membranes may be used in this type of application for concrete surfaces that require impact and audible sound reduction.

All NAC sheet membrane systems require the use of the appropriate NAC Primer to ensure a permanent bond to the substrate.

For specification purposes, the NAC products used in this system are:

Super SAM 125 Membrane and NAC TAC Primer



[www.nacproducts.com](http://www.nacproducts.com) | 3200 South Main Street, Akron, OH 44319

See product PDS, Install, and SDS sheets for complete instructions and safety requirements.  
©2020 NAC Products, Inc. All Rights Reserved. Rev. 10/20